

Format Identifier

Format Identifier

The Format Identifier plug-in is used in order to allow customers to use a customized tool for identifying the format of the deposited file.

Multiple Format Identifiers

Institutions can optionally configure multiple format identifiers to enhance the reliability of the service and identify potential ambiguities. The first format identifier must be a PRONOM-based tool. Currently, the output of the additional tools are saved and searchable, but do not have operational impact on the system.

Plug-in Parameters

Depending on the specific implementation, a plug-in may or may not require parameters. If the plug-in does require parameters, they are populated during installation of a new instance of the plug-in.

[Home](#) / [Plug-In Management](#) / [Details](#)

Plugin Information

| | | | |
|----------------------------|-----------------------------------|----------------------------|---|
| Plug-In Id | 19365070 | Plug-In Name | <input type="text" value="FFDroidIdentifier"/> |
| Plug-In Type Name | FormatIdentificationPlugin | Implementation Type | JAVA |
| Implementation Name | com.exlibris.dps.repository.pl... | Interface | - |
| Owner | CRS00 | Material Type | DIGITAL |
| Family Type | TASK | Description | <input type="text" value="DROID file format identifier"/> |
| Resource Type | - | Module | - |
| Status | ACTIVE | Plug-In Version | 96.0 |
| Public API | - | | |

Contact Information

| | | | |
|---------------------|---------------------------|----------------------|-----------------------|
| Contact Type | admin | Email address | yuliar@exlibris.co.il |
| Last Name | Ltd | First Name | Exlibris |
| Address 1 | Agodat Asport2 Building 9 | City | Jerusalem |
| Telephone 1 | (050)746-1234 | | |


Plugin Parameters

* Maximum number of bytes to scan

Format Identifier Plug-in Information Page


Usage

A list of the implemented Format Identifier plug-ins is available on the Format Identification Task Parameters page.

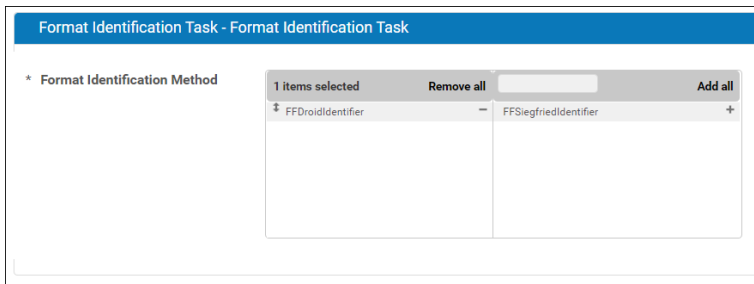

Task Parameters Format Identifier Plug-in

A list of the implemented Format Identifier plug-ins is also available on the Format Auto Correction Rules page.

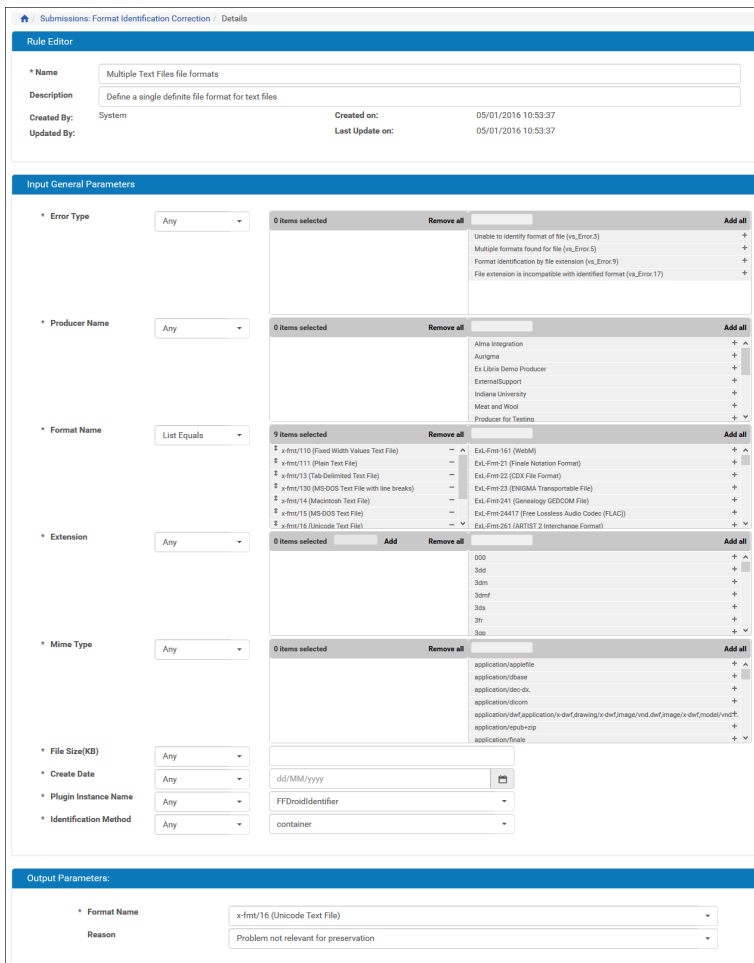

Format Identification Auto-Correction Rules - Details

Implementations

Rosetta includes an implementation of DROID as a Format Identifier plug-in. You can add additional format identifier plug-ins, but you must include at least one PRONOM based tool, and this tool must be listed first. If you implement several PRONOM based tools including DROID, DROID must be first.

Plug-In Management

Bundled Custom

Filter: All Find: droid In: All Go

Add Plug-In Instance View 100 Records 1 - 1 of 1 Plug-In

| | Active | Plug-In Type Name | Plug-In Name | Description | Contact Person | Plug-In Version | | | |
|---|--------|----------------------------|-------------------|------------------------------|----------------|-----------------|----------------------|----------------------|------------------------|
| 1 | | FormatIdentificationPlugin | FFDroidIdentifier | DROID file format identifier | Exlibris Ltd | 90.0 | View | Edit | Delete |

Identification Plug-in Management