

修改显示标签

[返回到菜单](#)

To configure labels, you must have one of the following roles:

- General System Administrator
- Fulfillment Administrator


Note

This section applies only to Primo. For information regarding Primo VE and Alma-Summon environments, see the following pages:

- [Configuring Display Labels for Primo VE](#)
- [Configuring Display Labels for Alma-Summon](#)

The Discovery Interface Labels Code Table page ([Configuration Menu > Discovery > Display Configuration > Labels](#)) contains predefined labels that appear in Primo. You cannot add or remove these labels, but you can edit the label's text to meet your requirements. For more information about code tables, see [Code Tables](#).

Labels for Booking are performed in Alma!

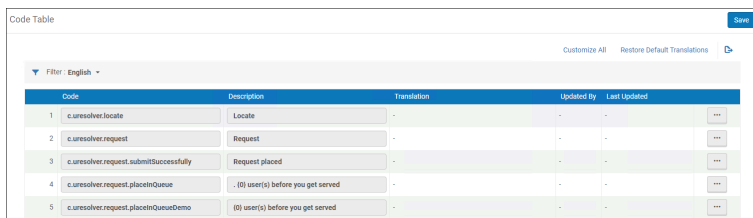

Code	Description	Translation	Updated By	Last Updated
1 e.caresolve.locate	Locate	-	-	-
2 e.caresolve.request	Request	-	-	-
3 e.caresolve.request.submitSuccessfully	Request placed	-	-	-
4 e.caresolve.request.placeInQueue	(0) user(s) before you get served	-	-	-
5 e.caresolve.request.placeInQueueDemo	(0) user(s) before you get served	-	-	-


Discovery Interface Labels Code Table (Partial Listing)

Note

- Labels can be configured at the institution level only. Select the required institution from the **Configuring** filter on the Fulfillment Configuration page.
- For user-created license terms that appear in Primo, see [Viewing User-Created License Terms that Appear in Primo](#).
- In addition to configuring labels, you can hide certain services, such as **Request a different issue** and **Don't see what you need? Request anyway** by configuring a display logic rule to hide a **General Hold Request** service. See [Adding Display Logic Rules](#) above.

In addition, you can add HTML code to these fields to change the display of labels. For example, if you modify the following field as indicated, the output appears as displayed in the figure below.

- `c.uresolver.request.request_type` = Request Type: ALL FIELDS REQUIRED!

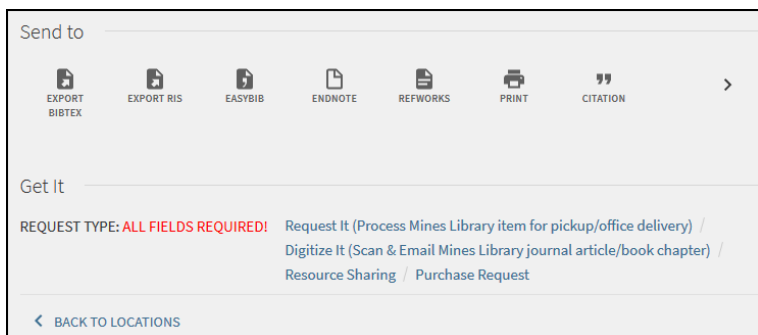

Modified Label with HTML in Primo Get It

List of Commonly Used Labels

Commonly Used Interface Labels and Where They Are Found In The Interface

Label Code	Default Value	Location in Interface
<code>c.search.htmlCreator.unifiedDisplay</code>	<p>{0} copy, {0} available, {0} requests</p> <p>Formatted as: <code>{{copies_labels}}</code>, <code>{{available_labels}}</code>, <code>{{requests_labels}}</code>. All content in curly brackets cannot be changed or translated because it represents other labels. Text can be added before, after or between each pair of curly brackets. Or one of the labels can be removed.</p>	<p>The following variables display the count in the items list:</p> <ul style="list-style-type: none"> • <code>{{copies_labels}}</code> is populated with information from the following codes: <ul style="list-style-type: none"> ◦ <code>c.search.htmlCreator.copy</code> – Used for a single copy. ◦ <code>c.search.htmlCreator.copies</code> – Used if there are multiple copies. • <code>{{available_labels}}</code> is populated with information from the <code>c.search.htmlCreator.available</code> code. If you have configured Time to reshelve, information from the following codes may replace it: <ul style="list-style-type: none"> ◦ <code>c.uresolver.getit2.item_list.status.SOME_HOLDING_ITEMS_AWAITING_RESHELVING</code> ◦ <code>c.uresolver.getit2.item_list.status.ALL_HOLDING_ITEMS_AWAITING_RESHELVING</code> • <code>{{requests_labels}}</code> is populated with information from the following codes: <ul style="list-style-type: none"> ◦ <code>c.search.htmlCreator.request</code>– Used if there is a single request. ◦ <code>c.search.htmlCreator.requests</code>– Used if there are multiple requests. ◦ <code>c.search.htmlCreator.noRequests</code>– Used if there are no requests.

Label Code	Default Value	Location in Interface
c.uresolver.locate	Locate	Link to locate location in library (location map). Appears both in items list (when only one holding) and holdings list (when more than one holding).
c.uresolver.request	Request	
c.uresolver.request.submitSuccessfully	Request Placed	This label displays in Get It after a request has been submitted.
c.uresolver.request.placeInQueue	For customers that went live before the August 2019 release, the default value is: Place in queue is {0}. For customers going live in August 2019 or later, the default value is: {0} user(s) before you get served.	This label displays in Get It after a request has been submitted.
c.uresolver.request.placeInQueueDemo	Place in queue: {0}	This label displays the tentative place in the queue of a hold request, before the request is placed. It is displayed in Get It when the user selects the Calculate Queue button in the request form before placing the request.
c.uresolver.request.submitFailed	Failed to place a request on the resource. Please contact the library.	This label displays in Get It when a request submission fails.
c.uresolver.request.title	Details of title you requested:	This label displays on the top of a digitization or hold request form.
c.uresolver.request.notNeededAfter	Not Needed After:	This label displays on the Hold Request form.
c.uresolver.request.Partial.madatoty_comment	Please add the part to digitize	Partial digitization confirmation message
c.uresolver.request.institution_dropdown_my_institution	My Institution	In fulfillment network configuration, the pickup location selection in the request form displays a My Institution option.
c.uresolver.request.institution_dropdown_other_institutions	Other Institutions	In fulfillment network configuration, the pickup location selection in the request form displays a label, Other Institution, above the additional options.
c.uresolver.request.comment	Comment:	This label displays on the Request form.
c.uresolver.request.manualDescription	Manual Description:	The Request a different issue link appears in Get It if the item has a description or the resource holding has a summary holdings field. This allows users to request items that may have not been cataloged. After selecting the Request a different issue link, this label appears on the request

Label Code	Default Value	Location in Interface
		form.
c.uresolver.request.submitRequest	Request	This label displays for the Request button at the bottom of the Request form.
c.uresolver.request.refresh	Refresh Services List	After submitting a request, the Refresh Services List link appears in Get It.
c.search.htmlCreator.copy	copy	Displays the count of total copies and copies available (X copy, Y available) in the items list.
c.search.htmlCreator.copies	copies	Availability display
c.search.htmlCreator.request	request	Availability display
c.uresolver.ServicesForThisTitle	Services For This Title	
c.uresolver.GeneralElectronicServices	Additional services	This label appears in View It when there are General Electronic services available.
c.uresolver.ServicesForRelatedTitles	Services For Related Titles	This label appears in View It when there are related records.
c.uresolver.availableOnline.full_text_prefix	Full text available at:	The label appears in View It when there is full text services available.
c.uresolver.availableOnline.selected_full_text_prefix	Selected full text available at:	The prefix for a full text link in View It.
c.uresolver.emptyList	No full text available	This label appears in View It when there is no full text services available.
c.uresolver.error	We're sorry. An error occurred while retrieving services for this title.	This label appears in Get It and View It if there was a processing error.
c.uresolver.request.ill	Resource Sharing Request:	This label appears at the top of the Resource Sharing Request form.
c.uresolver.request.ill.citationType.book	Book	This label appears as an option for the Citation Type field on the Resource Sharing Request form.
c.uresolver.request.ill.citationType.article	Article	This label appears as an option for the Citation Type field on the Resource Sharing Request form.
c.uresolver.request.ill.format.physical	Physical	This label is found on the Resource Sharing Request tab > Delivery Information > Format > Physical.
c.uresolver.request.ill.format.digital	Digital	This label is found on the Resource Sharing Request tab > Delivery Information > Format > Digital.

Label Code	Default Value	Location in Interface
c.uresolver.request.ill.format.physicalNonReturnable	Physical non-returnable	This label is found on the Resource Sharing Request tab > Delivery Information > Format > Physical non returnable.
c.uresolver.request.ill.delivery.library	Deliver to library	This label is found on the Resource Sharing Request tab > Delivery Location > Delivery to Library.
c.uresolver.request.ill.delivery.alternative	Alternative address	This label is found on the Resource Sharing Request tab > Delivery Location > Alternative address.
c.uresolver.request.ill.volume	Volume:	This label displays on the Resource Sharing Request form for both articles and books.
c.uresolver.request.ill.issue	Issue:	This label displays on the Resource Sharing Request form for articles.
c.uresolver.availableOnline.service_is_temporary_unavailable_due_to	Service temporarily unavailable due to	This label appears in View It when the service is temporarily unavailable and a Service unavailability reason has been defined in the Electronic Service Editor (see Service Unavailability Reason).
c.uresolver.availableOnline.service_is_temporary_unavailable	Service temporarily unavailable	This label appears in View It when the service is temporarily unavailable and there is no Service unavailability reason defined in the Electronic Service Editor (see Service Unavailability Reason).
c.uresolver.getit2.request.request_options	Request Options:	This label appears next to the list of request options in Get It.
c.uresolver.getit2.request.monograph	Request	This label appears for the Request link in Get It. If all items are monographs, the link will be at the title level.
c.uresolver.getit2.request.serial	Request	This label appears for the Request link in Get It. If there are serial items, the link will be at the item level.
c.uresolver.getit2.request.noitems	Don't see what you need? Request Anyway	This request option appears when the item is not available at this location. Select the link to create a request. The request that will be created is a General Request, see Creating a General Hold Request

Label Code	Default Value	Location in Interface
c.uresolver.getit.related_title_display	Inventory of related "{0}" is listed below	
c.uresolver.getit2.holding_list.location_map	Location Map	This is the column title for the Locate links in the holdings list.
c.uresolver.getit2.holding_list.related_holdings	Related holdings	This is the label that appears with related holdings. See the Enabling the Display of Related Records in Primo section for more information.
c.uresolver.getit2.ill_request.monograph	Resource sharing request	The Resource Sharing Request link displays in the request options at the title level when all items are monographs (without description) or there are no holdings.
c.uresolver.getit2.ill_request.serial	Resource sharing request	The Resource Sharing Request link displays in the request options at the title level when at least one of the items is serial (with description) or no items exist.
c.uresolver.getit2.digitization_request.monograph	Digitization	The Digitization Request link displays in the request options at the title level when all items are monographs (without description) or there are no holdings.
c.uresolver.getit2.digitization_request.serial	Digitization	The label displays in the holding item digitization service in Primo Get It.
c.uresolver.getit2.display_related_holding_separately_from_original_record	LOCATIONS FOR RELATED TITLES	The label that appears above the list of related holdings if the Separately from the original record holdings option is selected. See the Enabling the Display of Related Records in Primo section for more information.
c.uresolver.getit2.display_related_holding	Alma-Primo: Related title:{0} ({1}) Primo VE: Related title:{0}	Appears in Get It to indicate that the physical title is related to the record. For Alma-Primo environments only, the type of relation is appended to the end of the title. For example: Related title:Art / (Contains)
c.uresolver.getit2.item_list.pagination.records	Records	
c.uresolver.getit2.item_list.type	Type	The Type column is in the holding item in Primo Get It.

Label Code	Default Value	Location in Interface
c.uresolver.getit2.item_list.policy	Policy	The Policy column is in the item list in Primo Get It.
c.uresolver.getit2.item_list.status	Status	The Status column is in the holding item in Primo Get It.
c.uresolver.getit2.item_list.empty	No items exist. Please refer to the request options above	The label is in the items list when there is a holding without items.
c.uresolver.getit2.request_different	Request a different issue	The Request a different issue link will appear in Primo Get It if the item has a description or the resource holding has a summary holdings field. This will enable requesting items that may have not been cataloged.
c.uresolver.getit2.digitize_different	Digitize a different issue	The Digitize a different issue column is in the holding item in Primo Get It.
dlf.block.expiry		Configure with {0} to display the user's block expiry on the My Account page. For example, entering Expired on {0} in the label description will be displayed as Expired on 07/07/2017 .
dlf.onHoldShelf.until	until {0}	This label appears in the List of Requests in Primo's My Account . The first part of the status is based on the status and therefore may not be configured. Only the text of until {0} is configurable.
c.uresolver.request.part_to_digitize	Part to Digitize:	The label is in the digitization request in Primo Get It.
c.uresolver.getit2.holding_list.empty.top	Your search did not match any physical resource in the library	When there are no holdings, this is the first row in Primo Get It.
c.uresolver.getit2.holding_list.empty.signed_in_user	Use the link/s below in order to request the resource from other libraries	When there are no holdings, this is the second row in Primo Get It (if the user is signed in).
c.uresolver.getit2.holding_list.empty.signed_in_user.no_services	There are no services available	When there are no holdings and no services, this is the message shown in Primo Get It (if the user is signed in).
c.uresolver.getit2.holding_list.empty.bottom	Having problems? Please contact the ExLibris staff	When there are no holdings, this description is shown at the bottom in Primo Get It.
c.uresolver.getit2.holding_list.empty.guest_user	In order to receive options to request the resource from other libraries, please sign in.	When there are no holdings and user is not signed in, this is shown in Primo Get It.
c.uresolver.getit2.item_list.non_circulating	Not loanable	When item is not loanable (according to policy), the Policy under the item list will be Not loanable .

Label Code	Default Value	Location in Interface
c.uresolver.getit2.item_list.circulating	Loanable	When the item is loanable (according to policy), the Policy under the item list will be Loanable .
c.uresolver.getit2.item_list.alt_call_number_prefix	Additional location information:	A prefix for the alternative call number appears next to an item description in the Get It items page,
c.uresolver.getit2.item_list.status.ITEM_NOT_IN_PLACE	Item not in place	This is a status in the item list.
c.uresolver.getit2.item_list.status.ITEM_IN_PLACE	Item in place	This is a status in the item list.
c.uresolver.getit2.item_list.status.ACQ.with_expected_date	On order until {0}	This is a status in the item list (expiration date is included).
c.uresolver.getit2.item_list.status.TRANSIT.with_expected_date	In transit until {0}	This is a status in the item list (expected arrival time is included).
c.uresolver.getit2.item_list.status.NOPROCESS.with_no_expected_date	On Shelf	This is a status in the item list.
c.uresolver.getit2.item_list.status.WORK_ORDER_DEPARTMENT.with_expected_date	In process of {0} until {1}	This is a status in the item list (expiration date is included).
c.uresolver.getit2.item_list.status.WORK_ORDER_DEPARTMENT.with_no_expected_date	In process of {0}	In order to display this, it is necessary to create a Work Order Department and set the value for 'Work Time(days)' to 999999.
c.uresolver.getit2.item_list.status.LOST_LOAN.with_expected_date	Lost since {0}	This is a status in the item list.
c.uresolver.getit2.item_list.status.CLAIM_RETURNED_LOAN.with_expected_date	Claimed returned. Due on {0}	This is a status in the item list (due date is included).
c.uresolver.getit2.item_list.status.LOAN.with_expected_date	On loan until {0}	This is a status in the item list.
c.uresolver.getit2.item_list.status.OVERDUE.with_expected_date	On loan - overdue since {0}	This is a status in the item list.
c.uresolver.getit2.item_list.status.WORK_ORDER_DEPARTMENT.with_no_expected_date	In process of {0}	This is a status in the item list.
c.uresolver.getit2.item_list.status.ILL.with_expected_date	On ILL process until {0}	This is a status in the item list (when the Resource Sharing request has a due date.)
c.uresolver.getit2.item_list.status.ILL.with_no_expected_date	On ILL process	This is a status in the item list (when the Resource Sharing request doesn't have due date).
c.uresolver.getit2.item_list.status.TECHNICAL.with_no_expected_date	Technical	This is a status in the item list.

Label Code	Default Value	Location in Interface
c.uresolver.viewit.related_type_list.CONTAINS	Related Records	<p>This is the label for the relation type Contains. This label appears with View It related records.</p> <p>See the Enabling the Display of Related Records in Primo section for more information.</p>
c.uresolver.viewit.relatedTemplate	@TITLE (@RelationType)	This is shown in View It.
c.uresolver.missingProvider	view full text	This is the link to the full text in View It.